



ZERO ZONE

HIGHLIGHT
merchandise®

Highlight Merchandise® RHMC30 Hybrid™ Specs

Medium Temp Reach-In Remote Display Cases

1-Door, 2-Door, 3-Door, 4-Door, and 5-Door Cases

Applications



Beverage



Dairy



Deli



Produce

Quick Specs

Energy Use (Per Door Avg Daily)*

With Condensate Removal: 3.7 kWh

Without Condensate Removal: 3.6 kWh

*Standard Package with R-404A Refrigerant

Merchandising (5-Door)

Facings: 68.2 ft²

Packout: 136.4 ft³ with 30" wide x 24" deep shelves

Features & Options

High Humidity

Control climate challenges with advanced humidity package.

CoolView® Doors


30" wide x 68" tall CoolView® Envision® Doors

LED Lighting

ChillBrite® 4000K LED Lighting

Additional Models

The Highlight® Hybrid™ medium temp lineup offers standard, and tall cases. The standard cases are available with 24" or 30" wide doors.

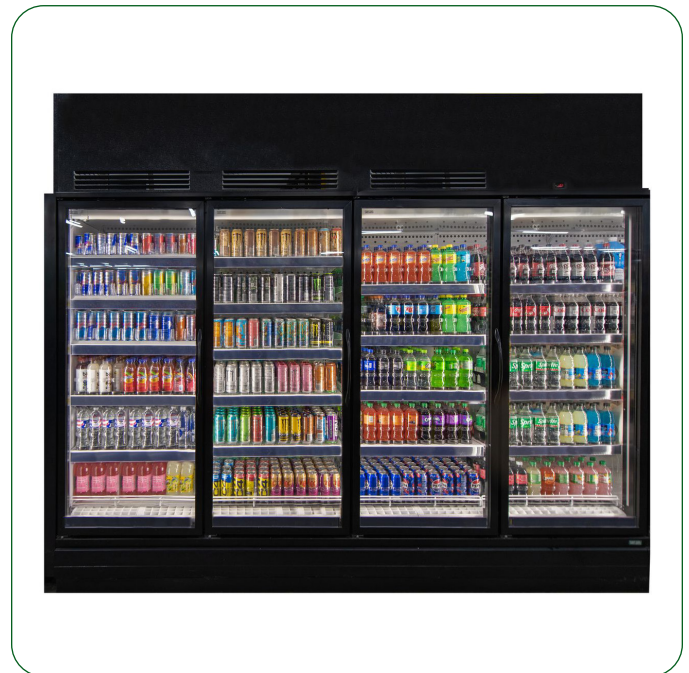

Manuals and Instructions:

<https://www.zero-zone.com/rhmc-rhlc>



Contact Us:

800-247-4496

www.zero-zone.com

Specifications are subject to change without notice. All dimensions are nominal.
Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower.



SS-119 Rev E • 9/26/2024

© 2024 Zero Zone, Inc.

Page 1 of 3





Standard Package

Refrigeration Data	R-404A Refrigerant					R-448A Refrigerant				
	1-Door	2-Door	3-Door	4-Door	5-Door	1-Door	2-Door	3-Door	4-Door	5-Door
Refrigerant Charge (lbs.) ¹	3.0	3.0	4.0	5.1	6.2	3.0	3.0	4.0	5.1	6.2
Zero Zone Condensing Unit #	69-10042	69-10042	69-10221	69-10324	69-10324	69-9933	69-9933	69-10222	69-10235	69-10237
Condensing Unit Crated Weight (lbs.)	61	61	69	66	66	61	61	69	66	120
Electrical & Energy Data ^{2, 3, 4}	With Condensate Removal System					With Condensate Removal System				
MOCP (amps) ^{5, 7}	15	15	15	15	15	15	15	15	15	20
MCA (amps) ^{6, 7}	8.2	7.7	8.5	14.2	14.8	8.2	7.7	8.5	14.2	16.0
Daily Energy Use (kWh)	3.6	7.1	11.7	12.8	15.9	3.3	6.6	10.9	12.0	15.6
Rejected Heat (Btu/h) ⁸	506	1,013	1,667	1,821	2,261	468	937	1,551	1,706	2,222
Electrical & Energy Data ^{2, 3, 4}	Without Condensate Removal System					Without Condensate Removal System				
MOCP (amps) ^{5, 7}	15	15	15	15	15	15	15	15	15	15
MCA (amps) ^{6, 7}	6.4	5.7	7.7	8.2	8.8	6.4	5.7	7.7	8.2	10.0
Daily Energy Use (kWh)	3.5	6.9	11.4	12.4	15.4	3.2	6.4	10.6	11.6	15.1
Rejected Heat (Btu/h) ⁸	492	984	1,624	1,763	2,190	454	908	1,508	1,649	2,150

High Humidity Package⁹

Refrigeration Data	R-404A Refrigerant					R-448A Refrigerant				
	1-Door	2-Door	3-Door	4-Door	5-Door	1-Door	2-Door	3-Door	4-Door	5-Door
Refrigerant Charge (lbs.) ¹	3.0	3.0	4.0	5.1	6.2	3.0	3.0	4.0	5.1	6.7
Zero Zone Condensing Unit #	69-10042	69-10221	69-10324	69-10045	69-10236	69-9933	69-10222	69-10235	69-10237	69-10232
Condensing Unit Crated Weight (lbs.)	61	69	66	120	150	61	69	66	120	150
Electrical & Energy Data ^{2, 3, 4}	With Condensate Removal System					With Condensate Removal System				
MOCP (amps) ^{5, 7}	15	15	20	20	30	15	15	20	20	20
MCA (amps) ^{6, 7}	8.8	8.8	15.1	17.5	25.5	8.8	8.8	15.1	17.5	19.4
Daily Energy Use (kWh)	5.9	12.9	15.0	22.2	32.9	5.4	11.9	15.0	19.2	23.3
Rejected Heat (Btu/h) ⁸	832	1,840	2,130	3,151	4,675	761	1,687	2,130	2,728	3,314
Electrical & Energy Data ^{2, 3, 4}	Without Condensate Removal System					Without Condensate Removal System				
MOCP (amps) ^{5, 7}	15	15	15	15	20	15	15	15	15	15
MCA (amps) ^{6, 7}	6.9	7.7	9.1	11.5	19.5	6.9	7.7	9.1	11.5	13.4
Daily Energy Use (kWh)	5.8	12.7	14.7	21.8	32.4	5.3	11.7	14.7	18.8	22.8
Rejected Heat (Btu/h) ⁸	818	1,811	2,088	3,094	4,604	747	1,659	2,088	2,671	3,243


Physical Data

Case Calculations	1-Door ¹¹	2-Door	3-Door	4-Door	5-Door
Facings (ft. ²)	13.6	40.9	54.5	68.2	27.3
Packout (ft. ³) 24" Shelves	27.3	81.9	109.0	136.4	54.5
Weight (lbs.) ¹⁰	532	783	1,033	1,343	1,683

- Notes:
- Refrigerant charge includes combined condensing unit and case charges.
 - Data based on Zero Zone ChillBrite® 4190 LED lighting, Zero Zone CoolView® Envision® doors, and SSC electronic fan motors. See separate remote case spec sheets for more details.
 - 208V (four-wire) service; 115/208V-1PH-60Hz; red and black AC Line, white AC neutral, green Safety Ground. Buck/boost transformer available for low voltage conditions.
 - Optional main service disconnect is available upon request.
 - MOCP (Maximum Over-Current Protection) is the maximum circuit breaker size that can be used to properly protect the product.
 - MCA (Minimum Circuit Ampacity) is used to calculate the minimum wire size. This is selected so wires will not overheat in typical operating conditions and prevent nuisance circuit breaker trips.
 - Zero Zone recommends that a circuit breaker size should be larger than the MCA, but smaller than or equal to the MOCP. For example, if the equipment is listed having an MCA of 36.8 amps and an MOCP of 45 amps, a 40 amp or 45 amp circuit breaker would be acceptable.
 - Adequate ventilation must be provided to dissipate rejected heat from the top of the unit for proper performance. Clearance of less than 30" above the top of the shroud to the ceiling requires special design considerations. See Zero Zone Hybrid™ Installation & Operation Manual for specific details.
 - High-Humidity Package includes high-wattage anti-sweat components that prevent condensation on doors and components in ambient conditions up to 85°F and relative humidity of 70%. An anti-sweat controller is required for DOE compliance.
 - Does not include weight of condensing unit. Weights include 2 end panels at 60 lbs. per pair.
 - 1-Door Highlight Merchandiser® is not designed to be joined with other display cases and is a standalone unit.



RHMC30 Hybrid™ Top View

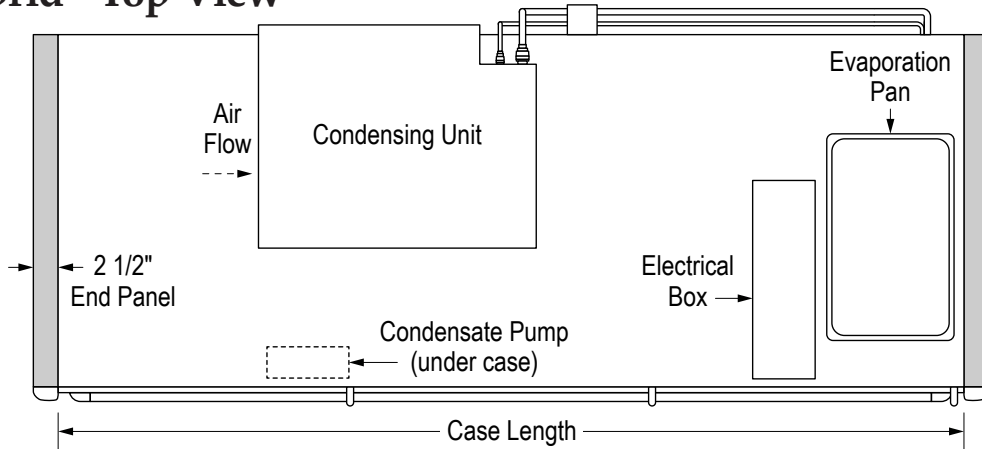

Measurements	1-Door	2-Door	3-Door	4-Door	5-Door
Case Length (in.) without End Panels	30 1/2	60 7/8	91 3/8	121 3/4	152 1/4
Case Length (in.) with End Panels	35 1/2	65 7/8	96 3/8	126 3/4	157 1/4

RHMC30 Hybrid™ Top View

