



## Crystal Merchandiser® RVMC24D Hybrid™ Specs

Deep Medium Temp Reach-In Remote Display Cases

2-Door, 3-Door, 4-Door, and 6-Door Cases

### Quick Specs

**Energy Use (Per Door Avg Daily)\***

**With Condensate Removal:** 2.8 kWh

**Without Condensate Removal:** 2.7 kWh

\*Standard package with R-404A Refrigerant

### Merchandising (6-Door)

**Facings:** 69.8 ft<sup>2</sup>

**Packout:** 156.5 ft<sup>3</sup> with 24" wide x 27" deep shelves

### Features & Options

#### High Humidity

Control climate challenges with advanced humidity package.

#### CoolView® Doors

30" wide x 74" tall CoolView® Ultra® Doors

#### LED Lighting

ChillBrite® 4000K LED Lighting

#### Additional Models

The Crystal® Hybrid™ medium temp lineup includes a standard and deep display case with 24" or 30" wide doors.

### Applications



Beverage



Dairy



Produce



Deli



Manuals and Instructions:

<https://www.zero-zone.com/rvmc-rvlc>



**Contact Us:**

800-247-4496

[www.zero-zone.com](http://www.zero-zone.com)

Specifications are subject to change without notice. All dimensions are nominal.  
Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower.



SS-90 Rev H • 9/26/2024

© 2024 Zero Zone, Inc.

Page 1 of 3





## Standard Package

Refrigeration Data	R-404A Refrigerant				R-448A Refrigerant			
	2-Door	3-Door	4-Door	6-Door	2-Door	3-Door	4-Door	6-Door
Refrigerant Charge (lbs.) <sup>1</sup>	4.0	4.0	6.0	6.2	4.0	4.0	6.0	6.2
Zero Zone Condensing Unit #	69-10042	69-10221	69-10324	69-10045	69-9933	69-10222	69-10235	69-10237
Condensing Unit Crated Weight (lbs.)	61	70	70	120	61	70	70	120
Electrical & Energy Data <sup>2, 3, 4</sup>	With Condensate Removal System				With Condensate Removal System			
MOCP (amps) <sup>5</sup>	15	15	15	15	15	15	15	15
MCA (amps) <sup>6</sup>	7.3	7.7	12.8	14.6	7.3	7.7	12.8	14.6
Daily Energy Use (kWh)	5.9	9.9	10.1	15.6	5.3	9.1	9.4	14.5
Rejected Heat (Btu/h) <sup>7</sup>	832	1,402	1,441	2,223	760	1,292	1,334	2,064
Electrical & Energy Data <sup>2, 3, 4</sup>	Without Condensate Removal System				Without Condensate Removal System			
MOCP (amps) <sup>5</sup>	15	15	15	15	15	15	15	15
MCA (amps) <sup>6</sup>	5.7	7.7	6.8	8.6	5.7	7.7	6.8	8.6
Daily Energy Use (kWh)	5.7	9.6	9.7	15.0	5.1	8.8	9.0	13.9
Rejected Heat (Btu/h) <sup>7</sup>	803	1,359	1,384	2,137	732	1,249	1,276	1,979

## High Humidity Package <sup>9</sup>

Refrigeration Data	R-404A Refrigerant				R-448A Refrigerant			
	2-Door	3-Door	4-Door	6-Door	2-Door	3-Door	4-Door	6-Door
Refrigerant Charge (lbs.) <sup>1</sup>	4.0	4.0	6.0	6.2	4.0	4.0	5.1	6.7
Zero Zone Condensing Unit #	69-10042	69-10324	69-10324	69-10045	69-9933	69-10235	69-10235	69-10232
Condensing Unit Crated Weight (lbs.)	61	70	70	120	61	70	70	150
Electrical & Energy Data <sup>2, 3, 4, 9</sup>	With Condensate Removal System				With Condensate Removal System			
MOCP (amps) <sup>5</sup>	15	15	15	25	15	15	15	20
MCA (amps) <sup>6</sup>	13.0	13.3	13.6	15.8	7.7	13.3	13.6	16.6
Daily Energy Use (kWh)	7.9	9.9	12.7	21.4	7.1	9.9	12.7	17.7
Rejected Heat (Btu/h) <sup>7</sup>	1,127	1,404	1,802	3,040	1,012	1,404	1,802	2,522
Electrical & Energy Data <sup>2, 3, 4, 9</sup>	Without Condensate Removal System				Without Condensate Removal System			
MOCP (amps) <sup>5</sup>	15	15	15	20	15	15	15	15
MCA (amps) <sup>6</sup>	7.0	7.3	7.6	9.8	5.7	7.3	7.6	10.6
Daily Energy Use (kWh)	7.7	9.6	12.3	20.8	6.6	9.6	12.3	17.1
Rejected Heat (Btu/h) <sup>7</sup>	1,098	1,361	1,745	2,954	983	1,361	1,745	2,436

## Physical Data


Case Calculations	2-Door	3-Door	4-Door	6-Door
Facings (ft. <sup>2</sup> )	23.7	35.2	46.7	69.8
Packout (ft. <sup>3</sup> ) 22" Shelves	53.0	78.8	104.8	156.5
Weight (lbs.) <sup>10</sup>	775	933	1,020	1,254

Notes:

1. Refrigerant charge includes combined condensing unit and case charges.
2. Data based on Zero Zone ChillBrite® 4000K LED lighting, Zero Zone CoolView® Ultra™ French-swing doors, and SSC electronic fan motors. See separate reach-in case spec sheets for more details.
3. 208V (four-wire) service; 115/208V-1PH-60Hz; red and black AC Line, white AC neutral, green Safety Ground. Buck/boost transformer available for low voltage conditions.
4. Optional main service disconnect is available upon request.
5. MOCP (Maximum Over-Current Protection) is the maximum circuit breaker size that can be used to properly protect the product.
6. MCA (Minimum Circuit Ampacity) is used to calculate the minimum wire size. This is selected so wires will not overheat in typical operating conditions and prevent nuisance circuit breaker trips.
7. Zero Zone recommends that a circuit breaker size should be larger than the MCA, but smaller than or equal to the MOCP. For example, if the equipment is listed having an MCA of 36.8 amps and an MOCP of 45 amps, a 40 amp or 45 amp circuit breaker would be acceptable.
8. Adequate ventilation must be provided to dissipate rejected heat from the top of the unit for proper performance. Clearance of less than 30" above the top of the shroud to the ceiling requires special design considerations. See Zero Zone Hybrid™ Installation & Operation Manual for specific details.
9. High Humidity Package includes high-wattage anti-sweat components that prevent condensation on doors and components in ambient conditions up to 85°F and relative humidity of 70%.
10. Does not include weight of condensing unit. Weights include 2 end panels at 60 lbs. per pair.



RVMC24D Hybrid™ Top View

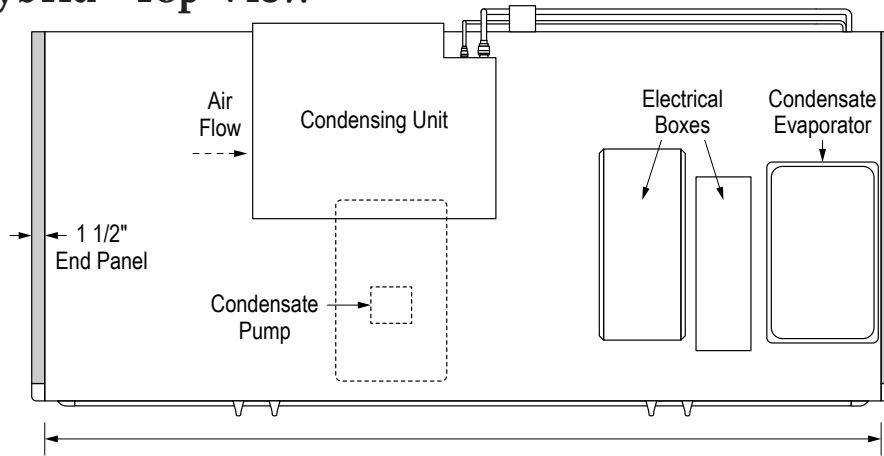

Measurements	2-Door	3-Door	4-Door	6-Door
Case Length (in.) without End Panels	48 1/8	72 1/4	96 1/4	143 7/8
Case Length (in.) with End Panels	51 1/8	75 1/4	99 1/4	146 7/8

RVMC24D Hybrid™ Top View

