



**HIGHLIGHT**  
merchandiser®

## Highlight Merchandiser® RHLC30T Remote Specs

Low Temp Tall Reach-In Remote Display Cases

2-Door, 3-Door, 4-Door, and 5-Door Cases, Back-to-Back (BB) Cases

### Applications



Ice Cream Frozen Food

### Quick Specs

#### Energy (Btu/h per Door)\*

**Frozen Food:** 950 at -7°F Evaporator

**Ice Cream:** 1,035 at -16°F Evaporator

\*when used with parallel rack system

#### Merchandising (5-Door)

**Facings:** 73.5 ft<sup>2</sup>

**Packout:** 147.0 ft<sup>3</sup> with 30" x 24" deep shelves

### Features & Options

#### Go Green

Remote cases ready for CO<sub>2</sub>. 90-bar rating available.

#### High Humidity

Control climate challenges with advanced humidity package

#### CoolView® Doors

30" wide x 73" tall CoolView® Envision® Doors

#### LED Lighting


ChillBrite® 4000K LED Lighting

#### Additional Models

The Highlight® low temp lineup offers a standard, tall, back-to-back, and ice merchandiser.

#### Hybrid™ Display Case

Available as Hybrid™ cases. See separate spec sheet.

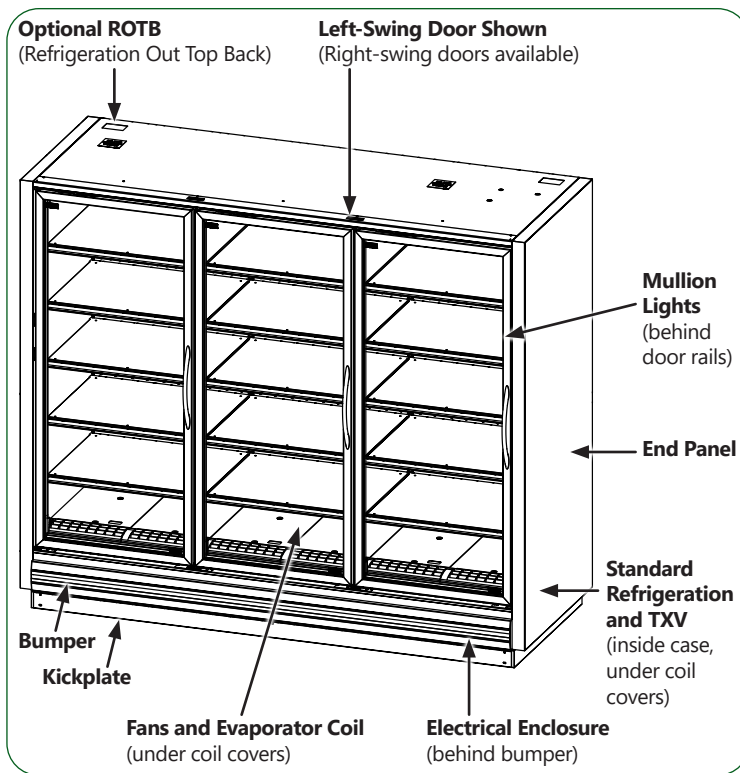

Manuals and Instructions:

<https://www.zero-zone.com/rhmc-rhlc>



#### Contact Us:

800-247-4496

[www.zero-zone.com](http://www.zero-zone.com)

Specifications are subject to change without notice. All dimensions are nominal.  
Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower.



SS-127 REV G • 5/4/2026

© 2026 Zero Zone, Inc.

Page 1 of 6





### Refrigeration Data



Set Points	Frozen Food (FF)	Ice Cream (IC)
Evaporator Temperature (°F) <sup>1</sup>	-7	-16
Discharge Air Temperature (°F) (w/ 8°F Superheat)	-3	-12

Notes:

- For high-glide refrigerants, use dew point for unit sizing. Adjust evaporator pressure as needed to maintain discharge air temperatures.



	Lineup Data		Individual Case Data (includes 1 pair of end panels)								
	Per Door Avg		2-Door		3-Door		4-Door		5-Door		
Energy Use with Parallel Rack System <sup>2</sup>	FF	IC	FF	IC	FF	IC	FF	IC	FF	IC	
RHLC30T Baseline Btu/h	950	1,035	2,080	2,250	3,030	3,290	3,980	4,320	4,920	5,370	
RHLC30TBB Baseline Btu/h (Each Side)	875	950	---	---	2,805	3,035	3,680	3,980	4,545	4,945	
Energy Use with Condensing Unit <sup>2</sup>	FF	IC	FF	IC	FF	IC	FF	IC	FF	IC	
RHLC30T Baseline Btu/h	1,010	1,100	2,205	2,385	3,210	3,490	4,220	4,580	5,215	5,690	
RHLC30TBB Baseline Btu/h (Each Side)	930	1,020	---	---	2,975	3,217	3,900	4,220	4,820	5,240	
Btu/h Adders	FF	IC	FF	IC	FF	IC	FF	IC	FF	IC	
Anti-Sweat High-Humidity Package	+90	+90	+180	+180	+270	+270	+360	+360	+450	+450	
Btu/h per case		FF	IC								
Glass Windowed End Panel (Each)	+315	+350									

Notes:

- Baseline Evaporator Btu/h based on LED lighting (Zero Zone ChillBrite® 4000K), standard-energy doors (Zero Zone CoolView® Envision®), and ECM or SSC electronic fan motors.



Refrigeration Piping: R-404A, R-448A & R-454C <sup>3</sup>	Outlet Size (in.)			
	2-Door	3-Door	4-Door	5-Door
Suction Line O.D. (Standard Refrigeration Exit)	7/8	7/8	7/8	7/8
Suction Line O.D. (Top Refrigeration Exit)	1/2	5/8	5/8	5/8
Liquid Line O.D. (Electric Defrost)	3/8	3/8	3/8	3/8
Liquid Line O.D. (Hot Gas Defrost)	1/2	1/2	1/2	1/2
Refrigeration Piping: CO <sub>2</sub> <sup>3</sup>	2-Door	3-Door	4-Door	5-Door
Suction Line O.D. (Standard Refrigeration Exit)	1/2	1/2	1/2	1/2
Suction Line O.D. (Top Refrigeration Exit)	1/2	1/2	1/2	1/2
Liquid Line O.D. (Electric Defrost)	3/8	3/8	3/8	3/8
Liquid Line O.D. (Hot Gas Defrost)	1/2	1/2	1/2	1/2

Notes:

- Read the Installation & Operation Manual for more about refrigeration piping to properly size individual risers for circuits of more than one case.



### Electrical & Energy Data <sup>4</sup>



	Per Door Avg		2-Door		3-Door		4-Door		5-Door	
Number of Fans			2		3		4		5	
Fan Motors (115V)	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
High-Efficiency Electronic (ECM or SSC)	0.70	23	1.40	46	2.10	69	2.80	92	3.50	115
Lighting System (120V)	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
LED Lighting	0.16	19	0.32	38	0.48	58	0.64	77	0.79	96
Anti-Sweat Heat (115V)	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
Standard-Energy Doors (CoolView Envision) <sup>5</sup>	0.75	86	1.52	175	2.26	260	3.01	346	3.75	431
High-Humidity Package (CoolView Envision) <sup>6</sup>	1.06	121	2.14	246	3.19	366	4.23	487	5.28	607
Solid Doors (CoolView Envision)	0.52	60	1.05	121	1.56	179	2.06	237	2.57	296
Defrost Heaters <sup>7, 8</sup>	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
Single Phase (208V/1/60Hz)	4.00	832	8.00	1,680	12.00	2,496	16.00	3,328	20.00	4,160

Notes:

- Amps are based on electrical nameplate values. Watts are based on laboratory observations of actual energy use.
- Standard doors include glass heat, rail heat, sill, and mullion heat.
- High-humidity package includes 10% increase in glass heat, rail heat, and mullion heat. This package also includes an anti-sweat controller if in the United States or Territories.
- Electric Defrost: 1 per day. Defrost termination temperature setting is 50°F. Failsafe time is 55 minutes. Refer to the Installation & Operation Manual for details.
- Hot Gas Defrost: 1 per day. Defrost termination temperature setting is 65°F. Failsafe time is 30 minutes. Refer to the Installation & Operation Manual for details. Zero Zone recommends 1 riser per refrigeration circuit when utilizing hot gas defrost.

### Physical Data



Merchandising	2-Door	3-Door	4-Door	5-Door
Facings (ft. <sup>2</sup> )	29.4	44.1	58.8	73.5
Packout (ft. <sup>3</sup> ) 22" Shelves	54.7	82.1	109.3	136.7
Packout (ft. <sup>3</sup> ) 24" Shelves	58.8	88.2	117.5	147.0
Shipping Weight without End Panels	2-Door	3-Door	4-Door	5-Door
RHLC30T Weight (lbs.)	755	1,055	1,420	1,800
RHLC30TBB Weight (lbs.)	---	2,105	2,840	3,595
Shipping Weight with Solid End Panels <sup>9</sup>	2-Door	3-Door	4-Door	5-Door
RHLC30T Weight (lbs.)	815	1,115	1,480	1,860
RHLC30TBB Weight (lbs.)	---	2,225	2,960	3,715
Shipping Weight with Windowed End <sup>9</sup>	2-Door	3-Door	4-Door	5-Door
RHLC30T Weight (lbs.)	865	1,175	1,540	1,920
RHLC30TBB Weight (lbs.)	---	2,325	3,060	3,815

Notes:


- Each solid end panel: 30 lbs for RHLC30T or 60 lbs for RHLC30TBB. Each windowed end panel: 60 lbs. for RHLC30T or 110 lbs for RHLC30TBB.




# Highlight Merchandiser® RHLC30T Remote Specs

RHLC30T and RHLC30TBB


## RHLC30T Top View



Building soffits must be set back at least 6" from the front of the doors to allow access to electrical wiring on the top of the case.

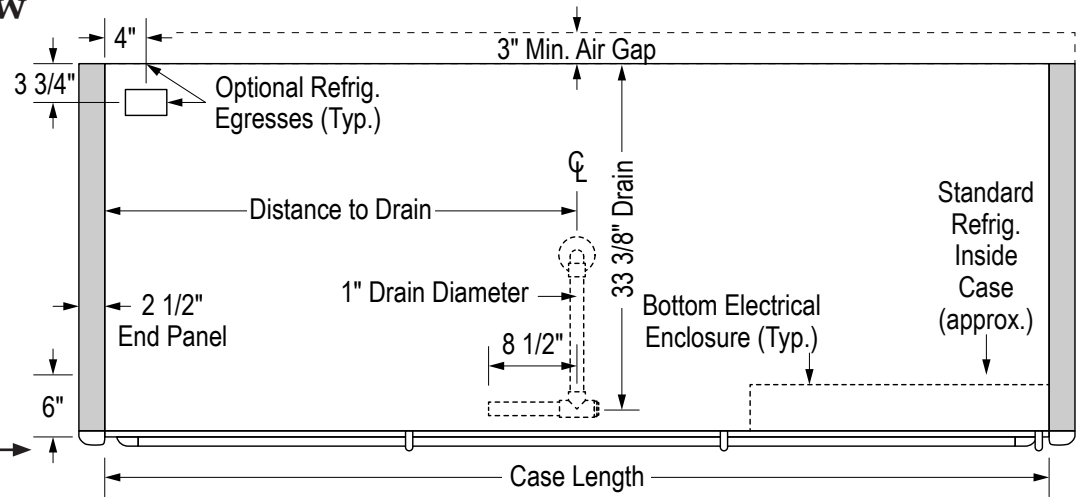

## RHLC30TBB Back-to-Back Top View

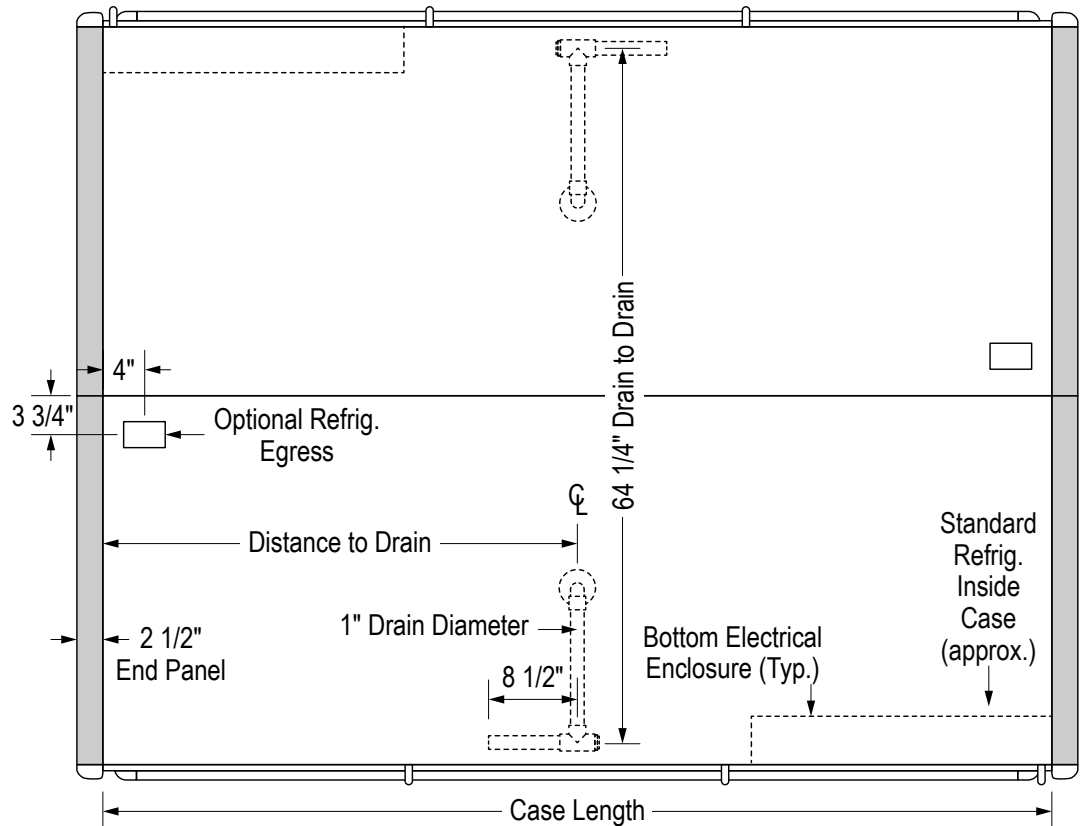


## Case Dimensions


Measurements	2-Door	3-Door	4-Door	5-Door
Case Length (in.) without End Panels	60 7/8	91 3/8	121 3/4	152 1/4
Case Length (in.) with End Panels	65 7/8	96 3/8	126 3/4	157 1/4
Distance to Drain (in.)	30 1/2	45 5/8	60 7/8	76 1/8



RHLC30T End View

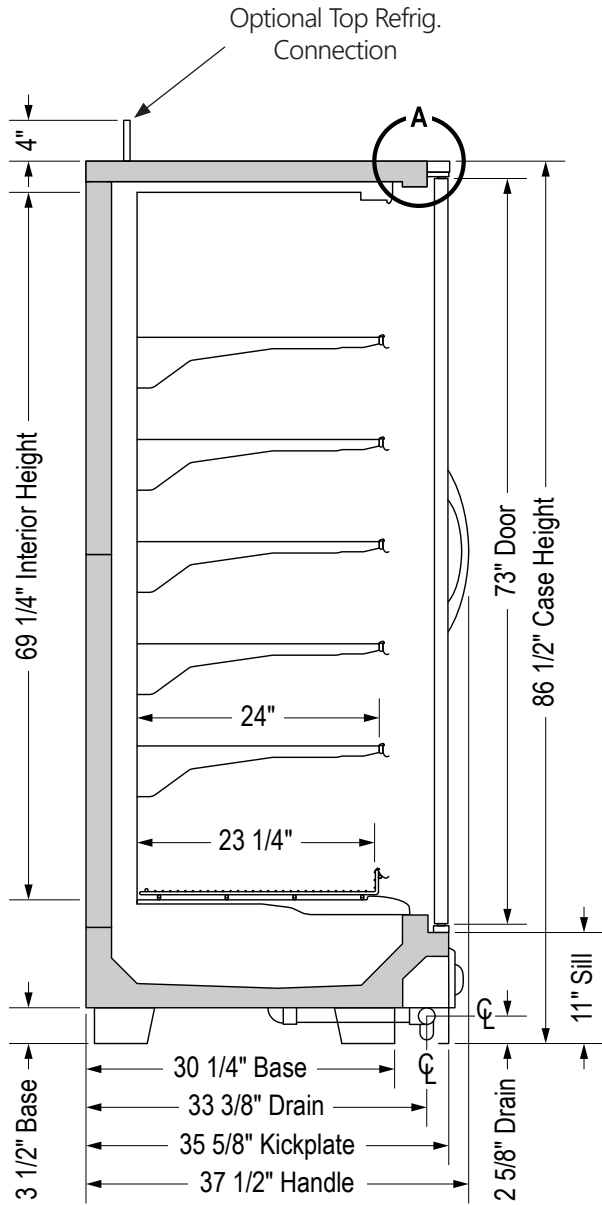

RHLC30TBB Back-to-Back End View

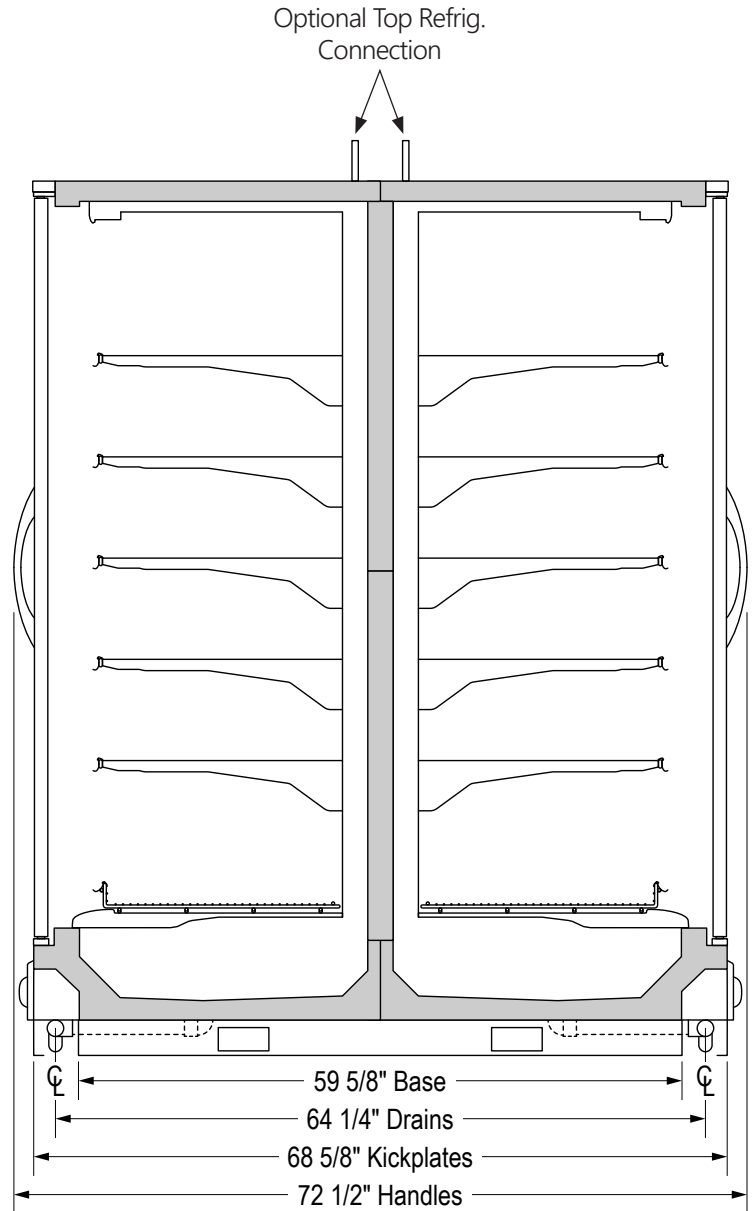

Base Notes:

- Base height options available: 1 3/4", 3 1/2", or 6 1/2".
- Changing bases affects case height and shipping height.
- Drain height from the floor: 2 5/8" with 3 1/2" base.
- Use 1 3/4" tall bases to fit through 80" doorways (shipping height = 79 5/8"). These bases must use hat channel rails.

Shelf Notes:

- 22" or 24" deep shelves.
- 2-position (0°, 10°) or 4-position (0°, 5°, 10°, 15°) shelves
- Available with 6" tall bottom baskets instead of bottom wire racks.



### R-454C RHLC30 End View

Case Notes:

- Each A2L case includes a 4 1/2" kickplate (5 1/2" for single-door cases), refrigeration outlet located at the top right, and the electronic egress for case power and sensors exit through the top.
- The leak detector is located internally to the display case.
- The mitigation fans for single door cases are centered on the front kickplate.
- The mitigation fans are located on the end kickplates on 2- through 5-door cases.
- Features not available in A2L: Back-to-Back, Hybrid, High Humidity, Ref. to bottom, Elec. to bottom, Light dimming, Condensate Pump or Evaporator Pan.

