



1RVZC30IM Specifications

Low Temp Reach-In Ice-Merchandiser with 63" Door

Note: Effective 1/1/12, all Zero Zone display cases manufactured for shipment within the U.S. meet or exceed current DOE energy requirements.

ENERGY DATA

Refrigeration
(see note #1 for components included in baseline Btuh)
Evaporator Temperature (°F)
Btuh w/ SSC Fan Motors ¹
Discharge Air Temp. (°F) (with 8°F Superheat)

INDIVIDUAL CASE DATA (Includes 1 Pair of End Panels)

1-Door Ice
0
1,168
+4

Fan Motors (115V) ¹	Amps	Watts
High Efficiency Electronic (SSC/ECM)	0.30	20
Lighting System (120V)	Amps	Watts
LED Lighting (Anthony OptiMax Pro24)	0.15	18
Anti-Sweat Door Heaters (115V)	Amps	Watts
Anthony ELM (w/ heated glass) ²	1.44	166
Defrost Heaters (115V)	Amps	Watts
Defrost Heater ³	9.10	1,047

Notes:

1. Amps are based on electrical nameplate values, watts are based on laboratory observations of actual energy use.
2. Reduced-Energy Doors = heated glass, heated rails, and frame heat.
3. Electric Defrost: 1 per Day, 28 minutes ice cream. Failsafe 45 minutes. Refer to the Installation and Operation Manual for details.
4. Weight does not include crate.

PHYSICAL DATA

Baseline R-404A Refrigeration Piping	Outlet Size (in.)	Number of Doors	Weight (lbs.) ⁴ 1RVZC30IM	Case Capacity Facings (ft. ²)	Packout (ft. ³)
1-Door Suction Line O.D.	1/2	1	530	14.1	25.8
Liquid Line O.D. (Electric Defrost)	1/4	End Panel	30	N/A	N/A




1RVZC30IM Specifications

Low Temp Reach-In Ice-Merchandiser with 63" Door

Dedicated 115 Volt, 20 Amp
Electrical Outlet Required
At Top of Case for
Condensate Evaporation Pan

20 1/4" Tall Shroud Available

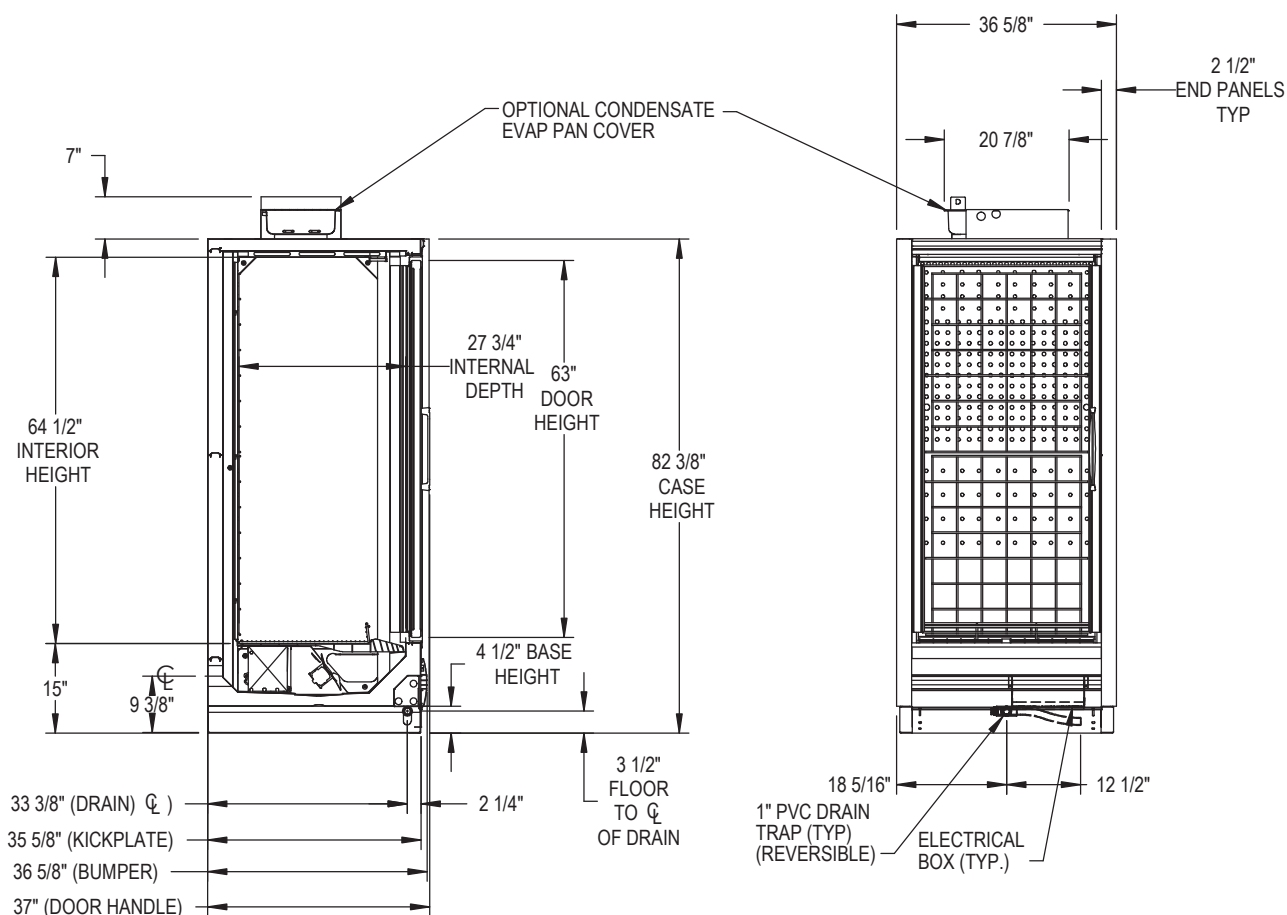

8/20/13

Specifications are subject to change without notice.

Case designed to operate in an ambient temperature of 75°F and relative humidity of 55% or lower.

EVOLUTION

Zero Zone, Inc. | 110 N Oakridge Drive | North Prairie, WI 53153-9792
Toll Free: 800-247-4496 | Fax: 262-392-6450
Zero-Zone.com

© 2013 Zero Zone, Inc.

